


TSR V16 555
TSR/K V16 555 **TECSEDO® SAFE Rake**

V16

TSR/K V16 555
RAL 8017- STUCCO

TSR V16 555
RAL 9010 - GLATT

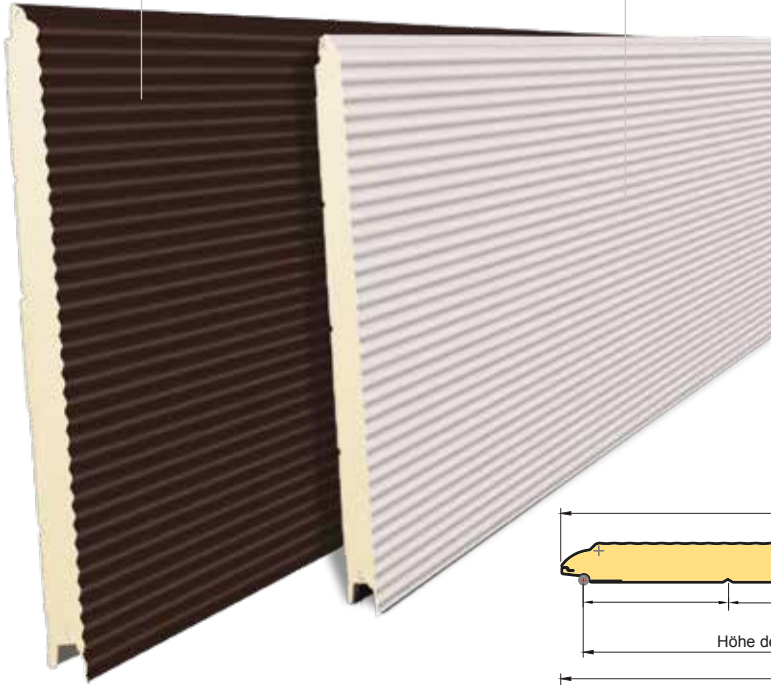

555 mm	Gewicht der Paneele:	
	ST LI P25	5.03 Kg/m
	Toleranz Gewicht	±5%
	Rippe (Standard)	125 mm
	Rippe (Version K)	100 mm
	$\lambda \frac{mW}{m \cdot ^\circ C}$	<0.022
	$K \frac{Watt}{m \cdot ^\circ C}$	0.50
	I (ISO 717)	25
	Akustische IsolierungdB	
	40 mm	

