


TBR V16 500
RAL 1021 - STUCCO

TBR/K V16 500
RAL 9002- SMOOTH

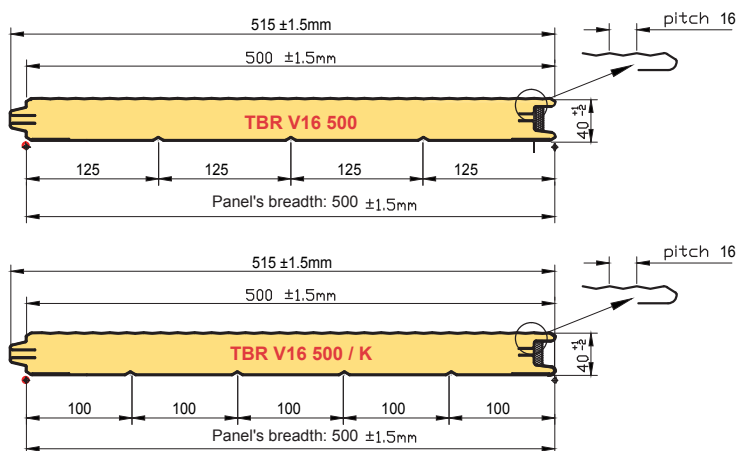

Panel Weight:	4.45 kg/m
Weight Tolerance	±5%
Ridges (Standard)	125 mm
Ridges (K Version)	100 mm
$\lambda \frac{mW}{m^{\circ}C}$	<0.022
$K \frac{Watt}{m^{\circ}C}$	0.50
I (ISO 717)	25
Soundproof Index (dB)	25

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face	* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.									
STUCCO													
	5µm Paintable Primer		STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010						Other RAL colours are available on request, subject to minimum quantities	
	25µm Polyester		OTHER COLOURS	RAL 3000	RAL 3005	RAL 5010	RAL 6005	RAL 6009	RAL 7004	RAL 7016	RAL 8017		RAL 9006
SMOOTH													
	25µm Polyester			RAL 1013	RAL 7016	RAL 7035	RAL 9002	RAL 9006	RAL 9007	RAL 9010	For other models and colors, please contact us		
INTERNAL FACE	COLOURS			25µm Polyester		RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth				