


TSM 610 RAL 9010 - STUCCO
TSM/K 610 RAL 7016 - SANDGRAIN



610 mm	Panel Weight:	
	ST WG	P25 & P5 5.45 Kg/m
	POLY	POLY 25 5.95 Kg/m
	WG SM	P45 & P35 SAND 5.75 Kg/m
	Weight Tolerance ±5%	
	Ridges (Standard) 122 mm	
	Ridges (K Version) 101 mm	
$\lambda \frac{mW}{m^{\circ}C}$		<0.022
$K \frac{Watt}{m^{\circ}C}$		0.50
I (ISO 717)		25
Soundproof Index (dB)		
40 mm		

Panel weight is for indication purposes only. Due to the typical tolerances gotten during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

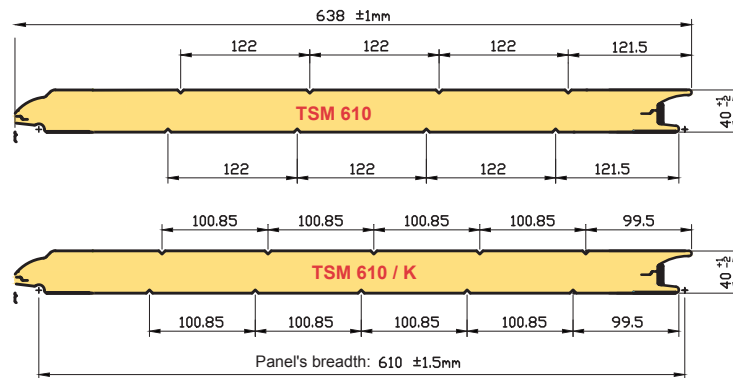

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
STUCCO									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
OTHER COLOURS		RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities		
WOODGRAIN									
	5µm Paintable Primer		STANDARD GREY						
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010				
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 9006	Other RAL colours are available on request, subject to minimum quantities			
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
POLYGRAIN									
	25µm Polyammidic		RAL 7016	RAL 9016					
SANDGRAIN									
	35µm Super Polyester Wrinkled		RAL 7016						
SMOOTH									
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
INTERNAL FACE	COLOURS		25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth		