




TSR/K V8 500
RAL 9007 - STUCCO

TSR V8 500
RAL 9002 - SMOOTH

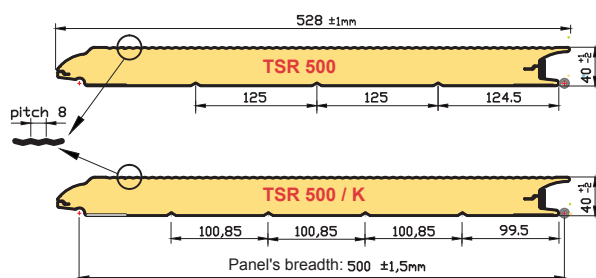

500 mm	Panel Weight:		
	ST SM	P25 & P5	4.60 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		125 mm
	Ridges (K Version)		100 mm
	λ	mW m °C	<0.022
	K	Watt m °C	0.50
	I (ISO 717)	Soundproof Index (dB)	25
		40 mm	

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecseido recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face							* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.	
STUCCO											
	5µm Paintable Primer		STANDARD COLOUR								
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010						
OTHER COLOURS		RAL 6005	RAL 6009	RAL 7016	RAL 8017	RAL 9006	RAL 9007			Other RAL colours are available on request, subject to minimum quantities	
SMOOTH											
	25µm Polyester		RAL 1013	RAL 7016	RAL 7035	RAL 9002	RAL 9006	RAL 9007	RAL 9010		For other models and colors, please contact us
INTERNAL FACE	COLOURS		25µm Polyester			RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth		