
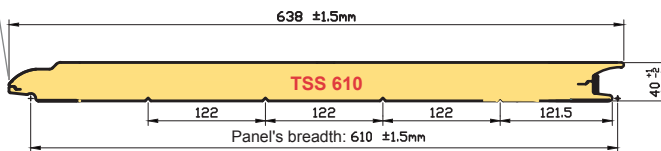


TSS 610  
RAL 8014 - WOODGRAIN

TSS 610  
RAL 9002- WOODGRAIN



610 mm	Panel Weight:		
	WG	P25 & P5	5.45 Kg/m
	POLY	POLY 25	5.95 Kg/m
	WG SM	P45 & P35 SAND	5.75 Kg/m
	Weight Tolerance		±5%
	Ridges (Standard)		122 mm
	$\lambda$	$\frac{mW}{m^2 \cdot ^\circ C}$	<0.022
	$K$	$\frac{Watt}{m^2 \cdot ^\circ C}$	0.50
I (ISO 717)		25	
Soundproof Index (dB)			
40 mm			

Panel weight is for indication purposes only. Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecse do recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face					* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.
<b>WOODGRAIN</b>								
	5µm Paintable Primer		STANDARD GREY					
	25µm Polyester	STANDARD COLOURS	RAL 8014	RAL 9002	RAL 9010			
		OTHER COLOURS	RAL 6005	RAL 7016	RAL 8017	RAL 9006	RAL 9007	Other RAL colours are available on request, subject to minimum quantities
45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER		
<b>POLYGRAIN</b>								
	25µm Polyammidic		RAL 7016	RAL 9016				
<b>SANDGRAIN</b>								
	35µm Super Polyester Wrinkled		RAL 7016					
<b>SMOOTH</b>								
	45 µm Super Polyester Multilayer HD+		V-GOLDEN	V-DARK	V-WENGÉ	V-MAHOGANY	V-WINCHESTER	
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester	RAL 9002 Stucco	RAL 9010 Stucco	RAL 9002 Smooth	RAL 9010 Smooth	