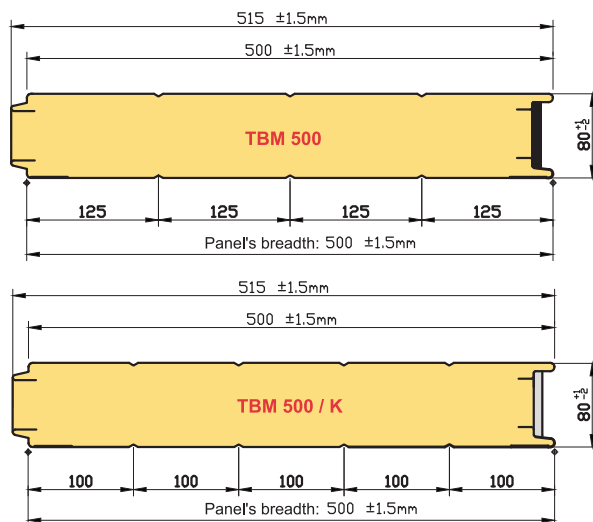



**TBM 500 & TBM/K 500** 80mm (STEEL)

**TECSEDO® BASE Micro**


500 mm	Panel Weight	5.55 kg/m
	Weight Tolerance	±5%
	Ridges (Standard)	125 mm
	Ridges (K Version)	100 mm
	$\lambda$ $\frac{mW}{m^{\circ}C}$	<0.022
	$K$ $\frac{Watt}{m^{\circ}C}$	0.26
	I (ISO 717) Soundproof Index (dB)	25
80 mm		

Panel weight is for indication purposes only.  
 Due to the typical tolerances getted during the several steps of the panels components manufacturing process, variations in the final weight of the panel can be found. For this reason and in accordance with the industrial "Best Practices", Tecsedo recommends to weigh the panels before using them for each door assembly, in order to choose the most suitable springs.

FINISHING External Face	COATING External Face	TYPE External Face	COLOURS* External Face		* Printed colours are for example only. To ensure proper colour and finishing representation, please contact TECSEDO and request a sample.
<b>STUCCO</b>					
	25µm Polyester	STANDARD COLOURS	RAL 9002	RAL 9010	
<b>INTERNAL FACE</b>	<b>COLOURS</b>		25µm Polyester		
			RAL 9002 Stucco	RAL 9010 Stucco	