

TSR V16 555 & TSR/K V16 555

TECSEDO® SAFE Rake


V16

TSR/K V16 555
RAL 8017- STUCCO

TSR V16 555
RAL 9010 - LISCIO




555 mm	Peso del pannello:	
	ST LI P25	5.03 Kg/m
	Tolleranza peso	±5%
	Nervature (standard)	125 mm
	Nervature (versione K)	100 mm
	$\lambda \frac{mW}{m \cdot ^\circ C}$	<0.022
	$K \frac{Watt}{m \cdot ^\circ C}$	0.50
	I (ISO 717)	25
	Isolamento acustico dB	
	40 mm	

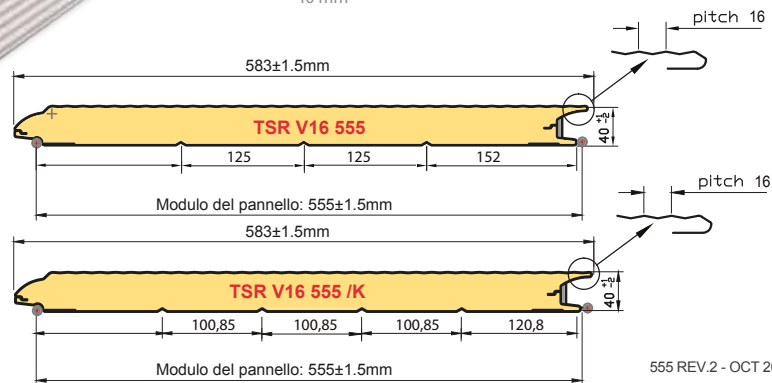



555 mm	Peso del pannello:		
	WG	P25	5.03 Kg/m
	POLY	POLY 25	5.45 Kg/m
	WG	P35	4.75 Kg/m
	LI	P35	5.30 Kg/m
Tolleranza peso			±5%
Nervature (standard)			125 mm
Nervature (versione K)			100 mm
$\lambda \frac{mW}{m^{\circ}C}$			<0.022
$K \frac{Watt}{m^{\circ}C}$			0.50
I (ISO 717)			25
Isolamento acustico dB			
40 mm			

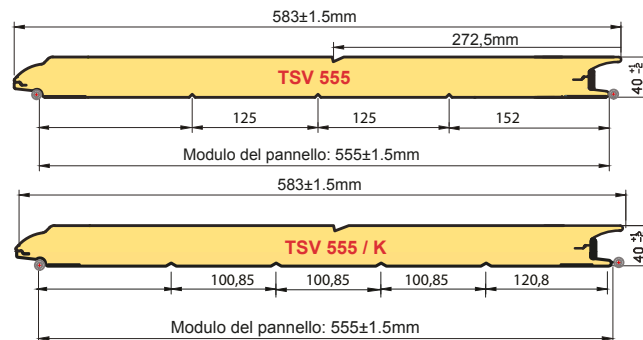

TSX 555 & TSX/K 555

TECSEDO[®] SAFE eXtra



555 mm	Peso del pannello:		
	ST	P25	5.03 Kg/m
	WG	P25	5.03 Kg/m
	POLY	POLY 25	5.45 Kg/m
	WG	P35	4.75 Kg/m
	LI	P35	5.30 Kg/m
Tolleranza peso		±5%	
Nervature (standard)		125 mm	
Nervature (versione K)		100 mm	
$\lambda \frac{mW}{m^{\circ}C}$		<0.022	
$K \frac{Watt}{m^{\circ}C}$		0.50	
I (ISO 717)		25	
Isolamento acustico dB			

40 mm

